

# 8 Gallon

## Electric/Gasoline - Single Stage

Ideal for construction-duty applications that require additional holding capacity. Also perfect for use with multiple tools.

**2 NEW models with high output 13.1 CFM**



AS1-PH65-08M

**Additional Features:**


- ✓ Splash lubricated cast iron crankcase
- ✓ Aluminum head for heat dissipation
- ✓ Large canister intake filter
- ✓ 10-inch fly wheel for extra cooling and longer life (12-inch fly wheel on 6.5- & 7.0-HP models)
- ✓ Powder coated 8-gallon twin tank receivers
- ✓ Convenient lifting handles
- ✓ 7-gauge base plate to reduce vibration
- ✓ Pneumatic tire with tube and steel hub
- ✓ Manual drain valves for proper maintenance

**Gasoline Features:**

- ✓ Industrial Honda OHV or Subaru OHC engine
- ✓ Directional air shroud

**Electric Features:**

- ✓ Industrial UL-listed electric motor
- ✓ Auto start/stop (continuous run optional)
- ✓ Industrial grade pressure switch
- ✓ Thermal overload motor protection

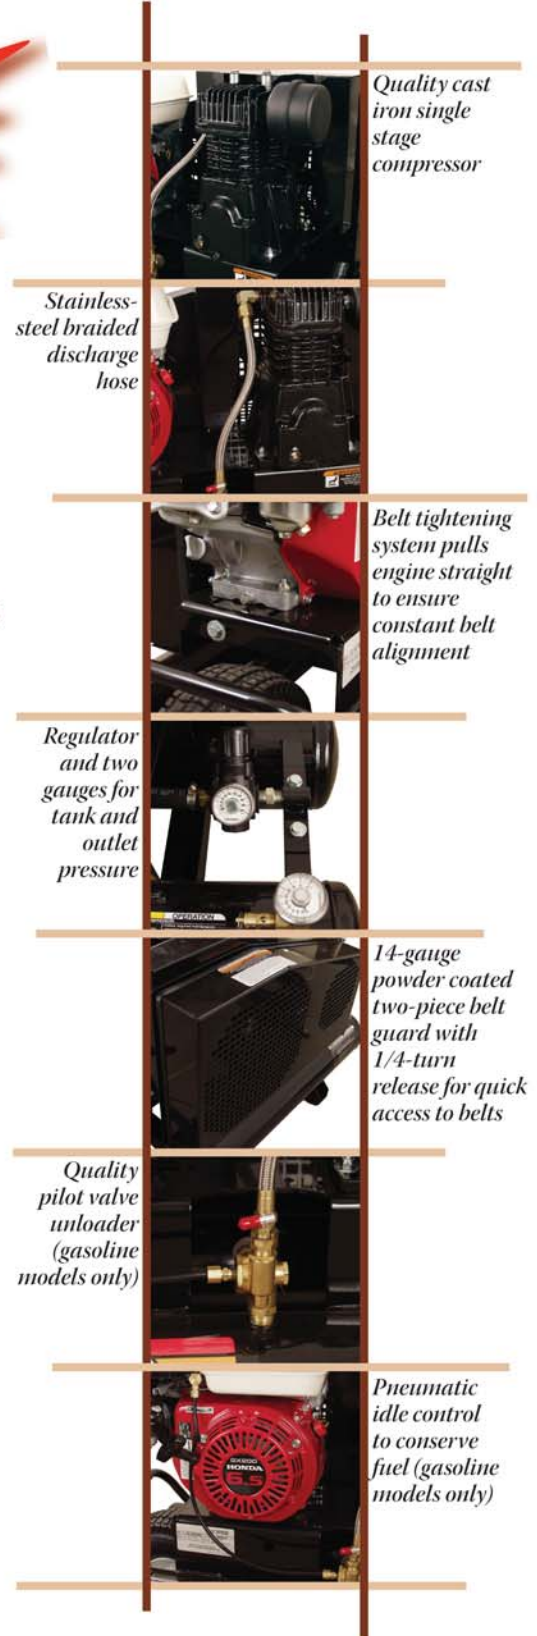

*Quality cast iron single stage compressor*

*Stainless-steel braided discharge hose*


*Belt tightening system pulls engine straight to ensure constant belt alignment*

*Regulator and two gauges for tank and outlet pressure*

*14-gauge powder coated two-piece belt guard with 1/4-turn release for quick access to belts*

*Quality pilot valve unloader (gasoline models only)*

*Pneumatic idle control to conserve fuel (gasoline models only)*



**611 Mc Kinley Ave.  
Bartonville, IL 61607  
888-345-0903**

## Specifications:

<b>Model #</b>	<b>AC1-PE15-08M</b>	<b>AC1-PE02-08M</b>
<b>Motor</b>	120V, 13.2A	120V, 18.8A
<b>Horsepower</b>	1.5	2.0
<b>CFM @ 100 PSI</b>	6.5	8.4
<b>Plug type</b>	NEMA 5-15P	NEMA 5-20P
<b>Pump</b>	Schulz	Schulz
<b>Dim. (LxWxH)</b>	44.5in.x18.5in.x25in.	44.5in.x18.5in.x25in.
<b>Shipping weight</b>	190 lbs.	190 lbs.
<b>Net weight</b>	170 lbs.	170 lbs.




NEMA 5-15P,  
15-amp plug



NEMA 5-20P,  
20-amp plug

<b>Model #</b>	<b>AC1-PH55-08M</b>	<b>AC1-PR06-08M</b>	<b>AS1-PH65-08M</b>	<b>AS1-PR07-08M</b>
<b>Engine</b>	Honda OHV	Subaru OHC	Honda OHV	Subaru OHC
<b>Horsepower</b>	6.5	7.0	6.5	7.0
<b>CFM @ 100 PSI</b>	9.0	9.0	13.1	13.1
<b>Pump</b>	Schulz	Schulz	Schulz	Schulz
<b>Dim. (LxWxH)</b>	44.5in.x18.5in.x26in.	44.5in.x18.5in.x26in.	44.5in.x18.5in.x27in.	44.5in.x18.5in.x27in.
<b>Shipping weight</b>	200 lbs.	200 lbs.	200 lbs.	200 lbs.
<b>Net weight</b>	175 lbs.	175 lbs.	175 lbs.	175 lbs.

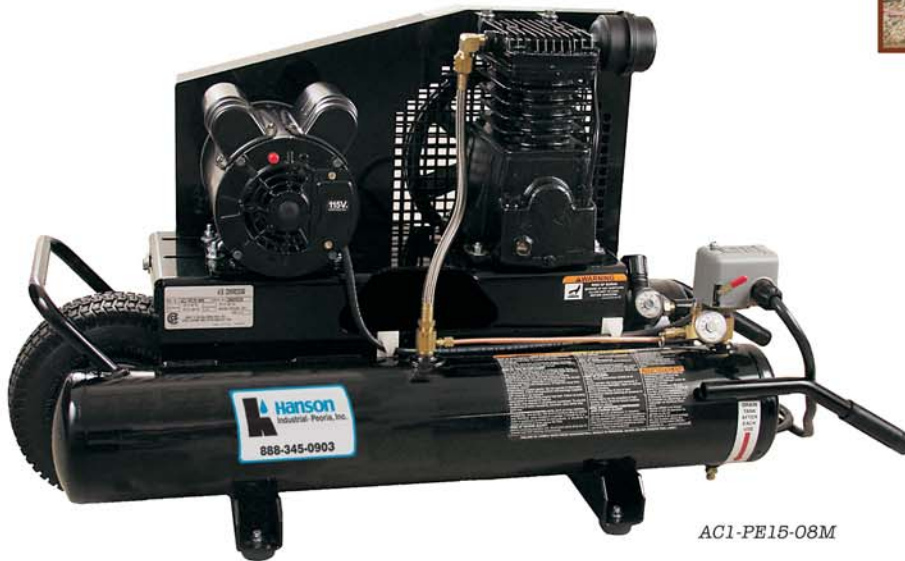

AC1-PE15-08M

### Options:

70-0357, 70-0380	Engine oil drain - Moves engine drain plug away from frame so oil can be drained into a container
AX-0002	Auto drain plastic bowl - Drains moisture from air system
AX-0004	Manual drain plastic bowl - Drains moisture from air system
AX-0005	Dual control - Electric compressor can be operated in start/stop mode or continuous run where pilot valve exhausts air to atmosphere
Consult Factory	Cable throttle control - Plastic coated steel cable increases and decreases engine RPM, thereby conserving fuel
TX-1001-W	Puncture-proof tire - Tire is flat-free, maintenance-free and non-marking, 10-inch, white hub, one tire

Model #	70-0357	70-0380	AX-0002	AX-0004	AX-0005	Cable (C/F)	TX-1001-W
All Electric Models			●	●	●		●
AC1-PH55-08M	●			●		●	●
AC1-PR06-08M		●		●		●	●
AS1-PH65-08M	●			●		●	●
AS1-PR07-08M		●		●		●	●

**611 Mc Kinley Ave.  
Bartonville, IL 61607  
888-345-0903**