

{Portable}



CBA Series

Gasoline - Belt Drive - Aluminum

This aluminum model is an excellent choice for customers looking for a lightweight, yet industrial-quality pressure washer.

*Lightweight
aluminum
frame*

*Corrosion-
resistant*

*Patent
Pending
Design*



*Water filter
with clear
sleeve for
screen
inspection*



*1-inch
aluminum
tube
handles for
easier
pulling*



*Patent pending
vibration
isolation plate
with four (4)
rubber isolators
for reduced
movement*



*3/16-inch
aluminum
base plate
and solid 7/8-
inch diameter
full-length
threaded axle*



*Two-piece
belt guard for
quick access to
belts*



*Dual
cogged
belt drive
system to
prevent
slippage*




Additional Features:

- ✓ Performance-proven engine with low-oil protection
- ✓ Belt drive triplex piston AR pump with ceramic plungers
- ✓ Thermal relief valve
- ✓ Adjustable pressure
- ✓ Stainless-steel and brass unloader
- ✓ Forged brass manifold
- ✓ Light, corrosion resistant aluminum frame
- ✓ Dual rubber isolators
- ✓ Pneumatic tires with tubes for longer life
- ✓ Quick connect nozzles (0°, 15°, 25° and 40°)
- ✓ 50-foot x 3/8-inch non-marking hose with quick connects, swivel and bend restrictors
- ✓ Professional-grade insulated trigger gun with safety lock-off
- ✓ 36-inch lance with rubber grip (48-inch lance on 3500- & 4000-PSI models)



Specifications:

Model #	CBA-3003-0MHB	CBA-3003-0MRB	CBA-3004-0MHB	CBA-3504-0MHB	CBA-4004-0MHB
Pressure (psi)	3000	3000	3000	3500	4000
Flow (gpm)	3.0	3.0	3.5	3.7	3.4
Engine	Honda OHV	Subaru OHC	Honda OHV	Honda OHV	Honda OHV
Horsepower	9.0	9.0	13.0	13.0	13.0
Dim. (LxWxH)	47in.x27.5in.x27.5in.	47in.x27.5in.x27.5in.	47in.x27.5in.x27.5in.	47in.x27.5in.x28.5in.	47in.x27.5in.x28.5in.
Shipping weight	187 lbs.	187 lbs.	215 lbs.	215 lbs.	215 lbs.
Net weight	137 lbs.	137 lbs.	165 lbs.	165 lbs.	165 lbs.

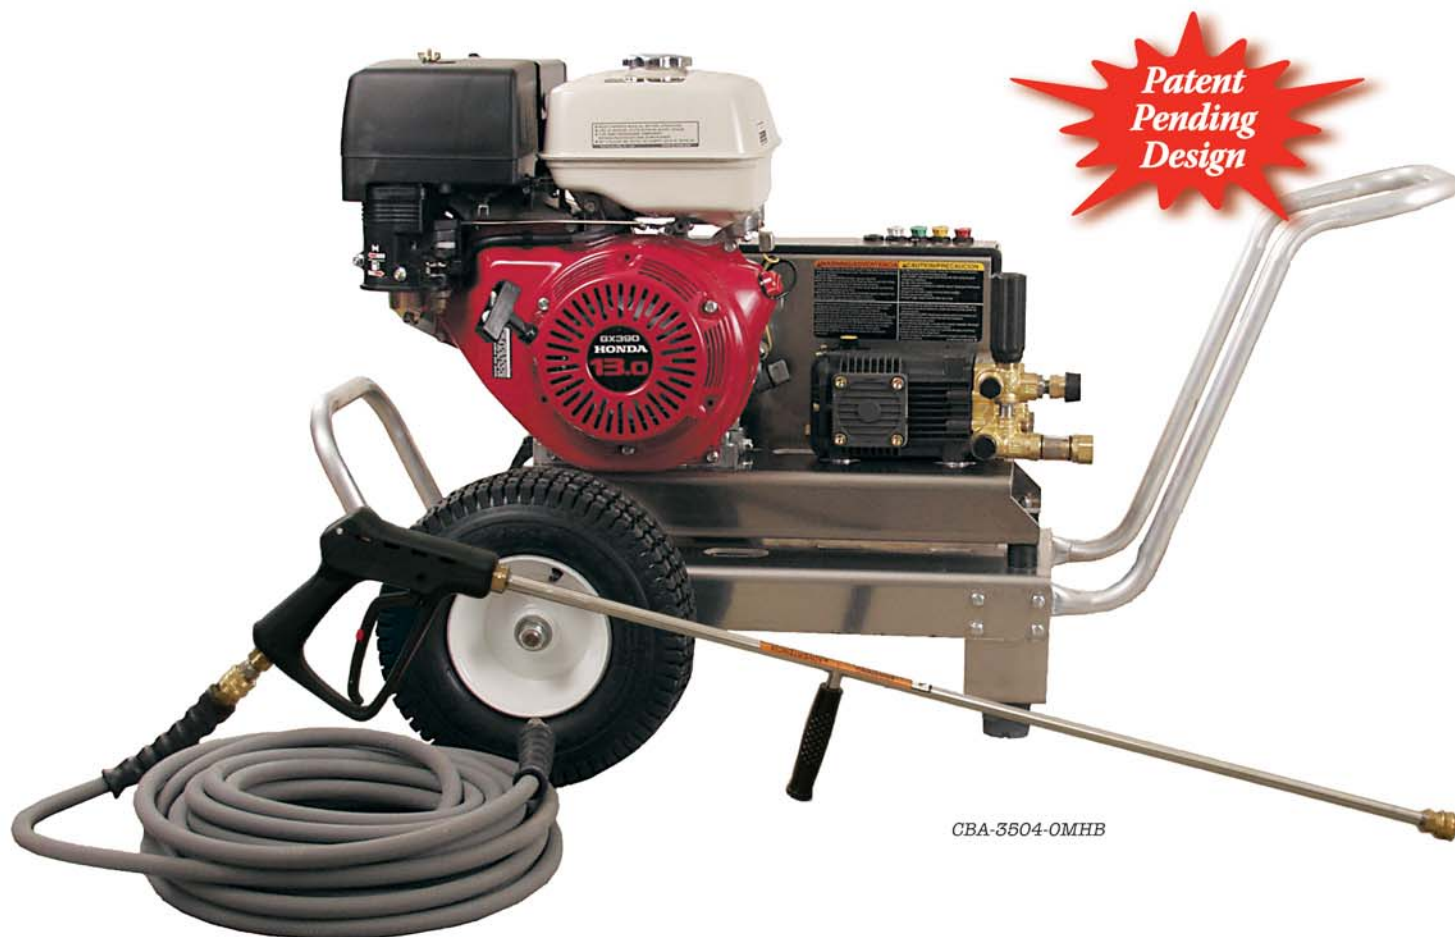

CBA-3504-0MHB

Options:

50-0161	High pressure detergent injection - High pressure water mixes with detergent to clean even the heaviest build-up
AW-8400-0021	Low pressure detergent injection - Allows the user to apply the recommended detergents
CX-0005	Insulated dual lance - Has both a high and low pressure tip that allows you to switch to the low pressure chemical injector without having to change tips
CX-0006	4000-PSI hose - Upgrades pressure hose to 4000-PSI rating
TX-1302-W	Puncture-proof tires - Tires are flat-free, maintenance-free and non-marking, 13-inch, white hub, two tires

Model #	50-0161	AW-8400-0021	CX-0005	CX-0006	TX-1302-W
All Models	●	●	●	●	●

**611 Mc Kinley Ave.
Bartonville, IL 61607
888-345-0903**